




# 2128P **BLUETOOTH**<sup>®</sup> UHF RFID READER

## HIGH PERFORMANCE, LONG RANGE RFID READING WITH THE CONVENIENCE OF EPOP-LOQ<sup>®</sup> CONNECTIVITY AND CHARGING

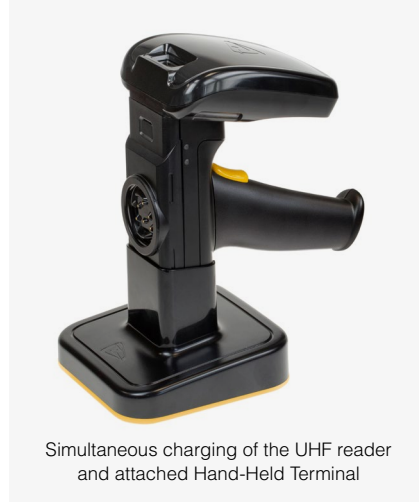

Simultaneous charging of the UHF reader and attached Hand-Held Terminal



Available with or without 2D Barcode Laser Scanner

### High Performance RFID Reading

The fixed High Gain Antenna provides up to 9m (29.5ft) of read range.

### Enhanced Modes of Operation

The 2128P UHF RFID Reader can provide in-reader tag de-duplication for more than 50,000 unique tags from more than 1 million tag reads. In addition the Reader can store on-board (using the embedded micro SD card) more than 500 million unique tags with date and time stamping for a truly powerful batch collection mode of operation.

Sophisticated user feedback provides the most configurable, in-depth and capable 'search and find' features currently available.

### Connect Devices Using ePop-Loq<sup>®</sup>

The 2128P UHF RFID Reader features the new TSL<sup>®</sup> ePop-Loq<sup>®</sup> connector. The patented ePop-Loq<sup>®</sup> system allows data and charge connections to be passed from the reader to an attached device, such as a smartphone or handheld terminal.

The unique ePop-Loq<sup>®</sup> system is designed to safely separate when the reader is subject to large impacts, such as when dropped.

### Single Point Charge Solution

The 2128P Docking Station allows charging of both the 2128P UHF RFID Reader and a smartphone or handheld terminal attached via an ePop-Loq<sup>®</sup> mount. This unique design can accommodate a wide range of devices from many handheld and smartphone manufacturers. The 2128P Docking Station Kit is supplied separately and includes the docking station, power supply unit and a USB data cable.

### Powerful and Comprehensive Software Development Tools

Applications developed for the 1128, 2128, 2128P 1153, 1166 or 2166 UHF RFID Readers can easily be configured to work with the 2128L, as all of these readers share TSL's unique 'ASCII 2 Protocol'. This sophisticated, parameterised set of commands carry out multiple actions locally within the reader. This approach enables multiple tag operations to be executed using simple pre-configured ASCII 2 commands which not only speeds integration of the reader into applications but also makes application development easier.

### Flexible Bluetooth<sup>®</sup> Connectivity

The 2128P supports both *Bluetooth*<sup>®</sup> Classic as well as *Bluetooth*<sup>®</sup> Low Energy (BLE). The reader can be operated in Serial Port Profile (SPP) or Human Interface Device mode (HID), as well as supporting iApp2 for Apple iOS devices. The reader also supports an automatic re-connect mode for both Android and Apple devices.

### Ultra Secure Data Gathering Option

As the ePop-Loq<sup>®</sup> system provides a wired connection between the host device and RFID Reader, sensitive data can be given that extra level of security by avoiding the use of wireless data transfer. The 2128P supports batch data collection and is equipped with a Micro SD socket and a real time clock. Up to 500 million transponder EPCs can be stored on a 32GB Micro SD card (optional purchase). This provides the ability to collect and log data even if USB or *Bluetooth*<sup>®</sup> communication channels are not available. Docking the 2128P then enables this data to be synchronised with a PC.

### Features:

**Long Range UHF RFID Reader**  
UHF RFID and 2D barcode data capture in a single device.

**Hardware Platform Independence**  
Operates with wide variety of *Bluetooth*<sup>®</sup> wireless technology enabled host devices from smartphones to tablets, laptops and desktop computers.

**OS Independence**  
The reader is compatible with Android, iOS and Windows.

**Integrated ePop-Loq<sup>®</sup> Socket**  
A smarter way of mounting devices to the UHF RFID reader.

**Bluetooth LE Support**  
Lower power consumption and longer battery life.

**Direct USB Connection**  
For increased security of data transfer via ePop-Loq<sup>®</sup> mounts.

**Lightweight**  
Only 400g (14.1oz) including battery, trigger handle and 2D Imager.

**High Performance Barcode Scanning**  
Integrated 2D imaging engine provides class leading barcode scan performance via its unique patent pending fast pulse illumination which delivers outstanding motion tolerance and class leading 1D and 2D data capture.



# 2128P SPECIFICATIONS

## Physical and Environmental Characteristics

Dimensions:	158 x 98 x 170 mm (LxWxH).
Weight:	445 g (including Trigger Handle & battery). 507 g (including Power Handle & battery).
User input:	Trigger button.
User feedback:	Speaker, vibration motor, LED - user configurable.
Power:	Removable, rechargeable 3.7 volt 2250 mAh Lithium Polymer pack. (Optional Power Handle with 6700 mAh Lithium Polymer pack available).
Minimum operating time:	Light use <sup>1</sup> : 11 hrs Moderate use <sup>2</sup> : 7.5 hrs Heavy use <sup>3</sup> : 4 hrs <small><sup>1</sup>Light Use: Continuous RFID inventories for 20s of every 120s <sup>2</sup>Moderate Use: Continuous RFID inventories for 10s of every 30s <sup>3</sup>Heavy Use: Continuous RFID inventories for 59s of every 60s</small>
Input Rating:	5.2VDC, 4.0A.
Enclosure materials:	Polycarbonate.

## Performance Characteristics

RFID engine:	TSL <sup>®</sup> custom module.
Communication protocols:	TSL <sup>®</sup> ASCII 2.0 parameterised command set and Impinj binary protocol.
Memory:	Optional Micro SD card (maximum 32GB capacity supported). Up to 500 million date and time stamped EPCs can be stored on a 32GB Micro SD card (separate purchase from alternative supplier).
Compatible Host devices (Bluetooth <sup>®</sup> ):	Any Bluetooth <sup>®</sup> Host <sup>1</sup> supporting the Serial Port Profile (SPP) or Human Interface Device (HID) profile (Android, iOS, Linux, Mac, Windows). See <a href="#">Bluetooth<sup>®</sup> Mode Comparison</a> .
Compatible Host devices (USB):	Any USB host with FTDI VCP driver support (Windows, Linux, Mac, Android).

## Environmental

Operating Temp.:	-10°C to 50°C (14°F to 122°F).
Charging Temp.:	Standard Trigger Handle (with Varta XL battery): 5°C to 40°C (41°F to 104°F). Power Handle: 0°C to 45°C (32°F to 113°F).
Storage Temp.:	Less than 1 month at -20°C to +45°C (-4°F to 113°F). Less than 6 months at -20°C to +35°C (-4°F to 95°F).
Humidity:	5% to 85% non-condensing.
Drop Spec:	Multiple drops to concrete: 4 ft./1.2 m ambient, 3ft / 0.9m across the operating temperature range.
Tumble:	1000 0.5 metre tumbles at room temperature (2000 cycles).
Electrostatic Discharge (ESD):	± 15kVdc air discharge; ± 8kVdc contact discharge.
MIL-STD 810F:	Meets and exceeds applicable MIL-STD 810F for drop, tumble and sealing.

## RFID Performance

Standards supported:	EPC Class 1 Gen 2.
----------------------	--------------------

Nominal read range <sup>2</sup> :	Up to 9 m (29.5 ft).
Nominal write range <sup>2</sup> :	Up to 4 m (13.1 ft).
Field:	150-degree forward facing.
Antenna:	Right Hand Circularly Polarized with optional 2D scanner.
Frequency Range:	865 - 868 MHz (EX1/ES1 variant). 902 - 928 MHz (AX1/AS1 variant).
Maximum Output Power:	Up to 30 dBm (region dependant) + 4.0 dBiC Antenna.

## Barcode Scanning

Barcode module:	Optional 2D imager.																		
Sensor Resolution:	1280 x 960 pixels.																		
Field of View:	Horizontal: 48°, Vertical: 36.7°.																		
Focal Distance:	From front of engine: 7.38 in (187.5 mm).																		
Aiming LED (V LD):	655 nm Laser.																		
Illumination:	2X Warm white LEDs.																		
Symbologies Supported:	1D: All major codes 2D: PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX).																		
Ranges <sup>3</sup> :	<table border="1"> <thead> <tr> <th>Barcode</th> <th>Near</th> <th>Far</th> </tr> </thead> <tbody> <tr> <td>3 mil Code 39</td> <td>7.1 cm</td> <td>15.8 cm</td> </tr> <tr> <td>6.67 mil PDF417</td> <td>5.6 cm</td> <td>26.9 cm</td> </tr> <tr> <td>10 mil DataMatix</td> <td>6.1 cm</td> <td>26.9 cm</td> </tr> <tr> <td>15 mil Code 128</td> <td>6.1 cm</td> <td>64.0 cm</td> </tr> <tr> <td>20 mil Code 39</td> <td>4.1 cm</td> <td>92.2 cm</td> </tr> </tbody> </table>	Barcode	Near	Far	3 mil Code 39	7.1 cm	15.8 cm	6.67 mil PDF417	5.6 cm	26.9 cm	10 mil DataMatix	6.1 cm	26.9 cm	15 mil Code 128	6.1 cm	64.0 cm	20 mil Code 39	4.1 cm	92.2 cm
Barcode	Near	Far																	
3 mil Code 39	7.1 cm	15.8 cm																	
6.67 mil PDF417	5.6 cm	26.9 cm																	
10 mil DataMatix	6.1 cm	26.9 cm																	
15 mil Code 128	6.1 cm	64.0 cm																	
20 mil Code 39	4.1 cm	92.2 cm																	

## Communication

Bluetooth <sup>®</sup> :	Bluetooth <sup>®</sup> Version 4.2.
Bluetooth <sup>®</sup> Frequency Range:	2.4 - 2.4835 GHz.
Bluetooth <sup>®</sup> Profiles:	SPP Profile, HID Profile, Apple iAP2, Bluetooth <sup>®</sup> Low Energy.
Bluetooth <sup>®</sup> Range:	Up to 100m.
Bluetooth <sup>®</sup> Pairing:	Simple Secure Pairing, NFC OOB Pairing.
Direct USB	USB connection to handheld terminal via ePop-Loq <sup>®</sup> cases (separate purchase).

<sup>1</sup> Compatible Bluetooth<sup>®</sup> stack required in the Host device

<sup>2</sup> Tag Read/Write performance is dependent on tag type, items tagged, number of tags in the field and other radio and environmental factors

<sup>3</sup> Artificial lighting can affect scanning performance

# 2128P SPECIFICATIONS


## Peripherals and Accessories

External interface:	Custom connector - requires 2128 Docking Station for battery charging, and USB connectivity.
USB operating modes:	Tethered for real time data capture in conjunction with SmartWedge software. Download of stored scan data.
Desktop charger:	TSL® 2128 Docking Station (separate purchase).
Power Handle	Alternative trigger handle gives approximately 3X the original battery capacity.
Other Accessories:	New ePop-Loq® cases can be ordered by special request (volume dependent, lead times apply).

## Regulatory

Regions	EU (CE), USA (FCC), Canada, Australia (see page 4 for details)
FCC ID	S6J2128P
IC	8948A-2128P
EMC	EN 55032:2015 +AC:2016 EN 55024:2010 +A1:2015 EN 301 489-1 V2.2.0 47 CFR Part 15B 15.107, 15.109 ICES-003 Issue 6
RF	EN 300 328 V2.1.1 EN 302 208 V3.1.1 EN 301 489-3 V2.1.1 EN 301 489-17 V3.2.0 47 CFR Part 15C 15.247 RSS-247 Issue 2
RF Exposure	EN 50566:2017 EN 62209-2:2010 EN 50663:2017 EN 62479:2010 47 CFR Part 2.1093 RSS-102 Issue 5

Electrical Safety	IEC 62368-1:2014 CB EN 62368-1:2014 +A11:2017 UL 62368-1:2014 CAN/CSA C22.2 No. 62368-1-14
Laser Safety (Imager Variants Only)	IEC 60825-1:2014, EN 60825-1:2014 IEC 62471:2006, EN 62471:2008 21 CFR 1040.10
Environmental	<b>2011/65/EU (RoHS 2)</b> Restriction of the use of certain Hazardous Substances in electrical and electronic equipment <b>2015/863 (RoHS 3)</b> Amendment to Annex II of 2011/65/EU

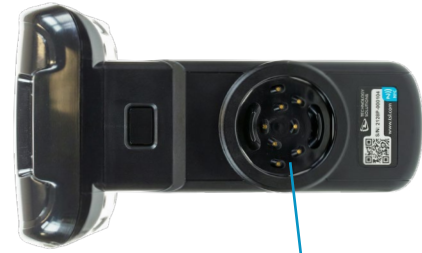

Integrated ePop-Loq® socket

## Warranty

The TSL® 2128P reader is warranted against defects in workmanship and materials for a period of one year (12 months) from date of shipment, provided the product remains unmodified and is operated under normal and proper conditions.

## Terms

"Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance. iPad, iPhone, iPod and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Technology Solutions UK Ltd is under license. Other trademarks and trade names are those of their respective owners.

## MOUNTS

Connect Enterprise Hand-Held Terminals using ePop-Loq® mounts:



Zebra TC20 / TC25



Zebra TC70 / TC75



Zebra TC51 / TC56



Datalogic Memor 1



Datalogic Memor 10



Honeywell D75e



Honeywell CT50 / CT60



Honeywell EDA50



Honeywell CT40



## TSL® RFID Apps



RFID Explorer  
[www.tsl.com/apps/rfid-explorer](http://www.tsl.com/apps/rfid-explorer)



RFID Scan Scan Write  
[www.tsl.com/apps/rfid-scan-scan-write](http://www.tsl.com/apps/rfid-scan-scan-write)



RFID Tag Finder  
[www.tsl.com/apps/rfid-tag-finder](http://www.tsl.com/apps/rfid-tag-finder)



TSL® Reader Configuration  
[www.tsl.com/apps/tsl-reader-configuration](http://www.tsl.com/apps/tsl-reader-configuration)



RFID Web Wedge  
[www.tsl.com/apps/rfid-web-wedge](http://www.tsl.com/apps/rfid-web-wedge)

# 2128P PART NUMBERS

Countries	Part Numbers	Operating Frequency
Albania Andorra Austria Belgium Bhutan Bosnia & Herzegovina Bulgaria Croatia Cyprus Czech Republic Denmark Estonia Falkland Islands Finland France French Guiana	Georgia Germany Greece Greenland Guernsey Guadeloupe Hungary Iceland Ireland Italy Jersey Latvia Liechtenstein Lithuania Luxembourg Macedonia	Malta Martinique Monaco Montenegro Netherlands Norway Poland Portugal Romania Slovakia Slovenia Spain Sweden Switzerland United Kingdom (UK)
United States of America (USA) Guam Guatemala Northern Mariana Islands	Canada Ecuador Puerto Rico	With 2D barcode imager: <a href="#">2128P-ES1</a>  No barcode imager: <a href="#">2128P-EX1</a>
Australia		With 2D barcode imager: <a href="#">2128P-AS1</a>  No barcode imager: <a href="#">2128P-AX1</a>
		With 2D barcode imager: <a href="#">2128P-AS1-AU</a> <a href="#">2128P-AX1-AU</a>
Bangladesh		With 2D barcode imager: <a href="#">2128P-AS1-BD</a> <a href="#">2128P-AX1-BD</a>
Colombia		With 2D barcode imager: <a href="#">2128P-AS1-CO</a> <a href="#">2128P-AX1-CO</a>

If you are interested in purchasing for a country/region that is not listed above, please contact [enquiries@tsl.com](mailto:enquiries@tsl.com) for assistance.

Accessories	Part Numbers
Docking Station, Power Supply and Mini USB Cable	<a href="#">2128-CRD-03-KIT</a>
4-Slot Battery Charger Kit	<a href="#">2136-01-4WMS-CHG</a>
Spare Battery for 1128/2128 UHF Reader	<a href="#">1128-00-BA-2000</a>
Power Handle for 2128, 2128P UHF RFID Readers	<a href="#">2102-PH-Y</a>

## ABOUT TSL®



Technology Solutions UK Ltd (TSL®), part of HID Global, is a leading manufacturer of high performance mobile RFID readers used to identify and track products, assets, data or personnel.

For over two decades, TSL® has delivered innovative data capture solutions to Fortune 500 companies around the world using a global network of distributors and system integrators. Specialist in-house teams design all aspects of the finished products and software ecosystems, including electronics, firmware, application development tools, RF design and injection mould tooling.

TSL® is an ISO 9001:2015 certified company.



ISO 9001: 2015

## CONTACT

<b>Address:</b>	Technology Solutions (UK) Ltd, Suite A, Loughborough Technology Centre, Epinal Way, Loughborough, Leicestershire, LE11 3GE, United Kingdom.
<b>Telephone:</b>	+44 1509 238248
<b>Fax:</b>	+44 1509 214144
<b>Email:</b>	<a href="mailto:enquiries@tsl.com">enquiries@tsl.com</a>
<b>Website:</b>	<a href="http://www.tsl.com">www.tsl.com</a>

## ABOUT HID GLOBAL



**HID Global powers the trusted identities of the world's people, places and things.** We make it possible for people to transact safely, work productively and travel freely. Our trusted identity solutions give **people** convenient access to physical and digital **places** and connect **things** that can be identified, verified and tracked digitally. Millions of people around the world use HID products and services to navigate their everyday lives, and billions of things are connected through HID technology. We work with governments, educational institutions, hospitals, financial institutions, industrial businesses and some of the most innovative companies on the planet. Headquartered in Austin, Texas, HID Global has over 4,000 employees worldwide and operates international offices that support more than 100 countries. HID Global is an ASSA ABLOY Group brand.

For more information, visit [www.hidglobal.com](http://www.hidglobal.com).

Technology Solutions (UK) Ltd reserves the right to change its products, specifications and services at any time without notice.