



## Ordering Information - 3166 Bluetooth® Rugged RAIN® RFID UHF Reader

### 3166 Reader Box Contents:



Battery (may already be already installed in the Reader). Please note that new batteries are discharged to less than 30% of their maximum capacity before shipping.



3166 RAIN RFID UHF Reader

For operation in **Europe**, order either an ETSI Lower Band or ETSI Upper Band variant:

Please refer to the [3166 Datasheet](#) for a list of which countries support each band.

- **3166-EX1** (ETSI Lower Band, No Barcode Imager)
- **3166-EX1-UP** (ETSI Upper Band, No Barcode Imager)
- **3166-ES1** (ETSI Lower Band, 2D Barcode Imager)
- **3166-ES1-UP** (ETSI Upper Band, 2D Barcode Imager)

For operation in **North America**, order an FCC variant:

- **3166-AX1-US** (FCC, No Barcode Imager)
- **3166-AS1-US** (FCC, 2D Barcode Imager)

For other regions/more information:

Please refer to the [3166 Datasheet](#) for details of all available regions.

If you are interested in purchasing for a country/region that is not listed, please [contact the TSL Enquiries Team](#)

### Please Note: Additional Purchases Required for Charging

A Docking Cradle, Power Supply Unit and IEC Line Cord (mains cable) are required in order to charge the 3166 Reader - see Page 2 for further details.






## 1166/3166 Docking Cradle Kit Contents:

Order:

**1166-CRD-01-KIT**

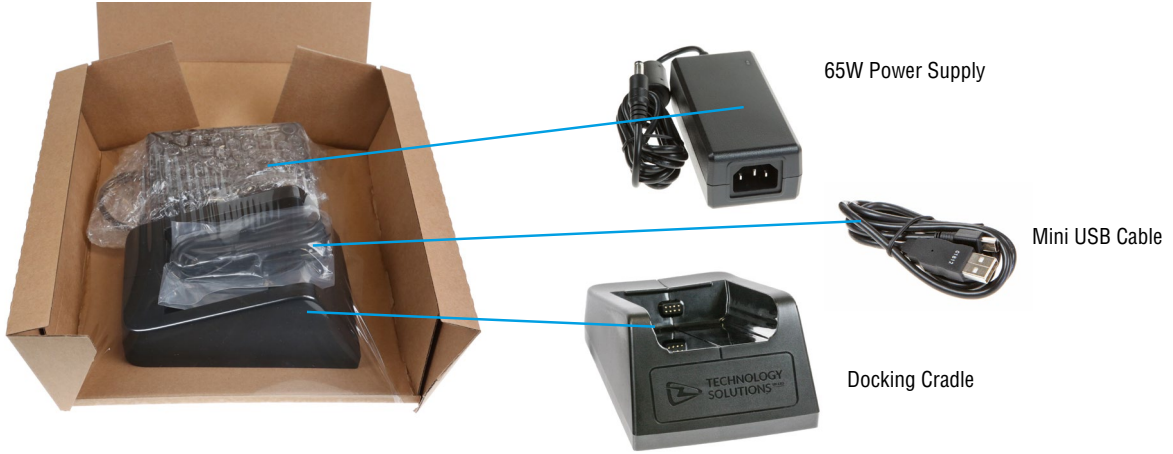

## IEC Line Cords Available from TSL:



For UK, order:  
**IEC-1M-UK**



For EU, order:  
**IEC-1.8M-EU**



For US, order:  
**IEC-1.8M-US**



For AU/NZ, order:  
**IEC-2M-AU-NZ**